



# Position sensor

2-axis CAN sensor for measuring tilt acceleration

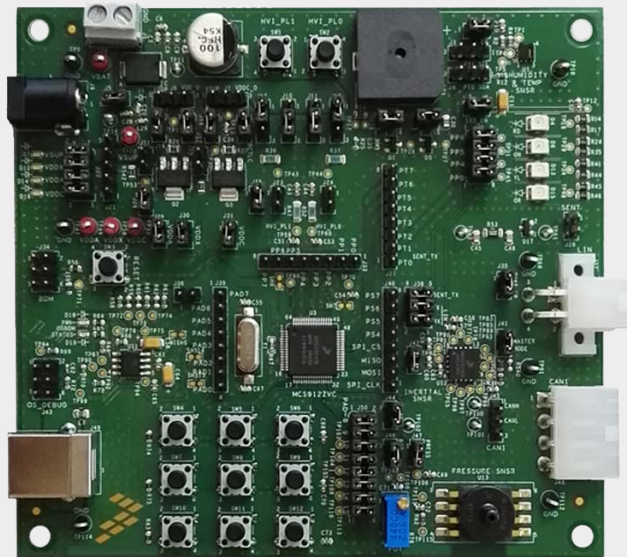

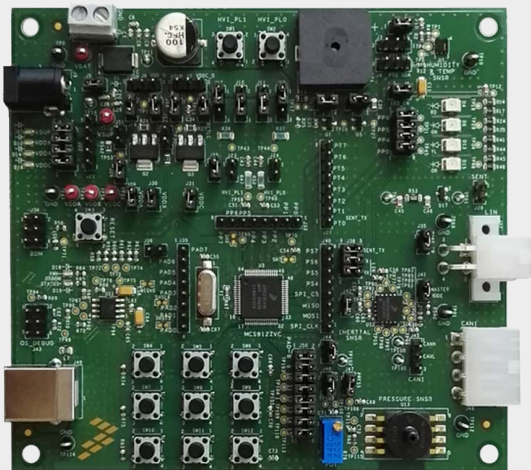

# Position sensor

2-axis CAN sensor for measuring tilt acceleration

## Key Features

CAN

1x CAN interface acc. to ISO 11898

J1939

J1939 protocol support

IP67

Robust plastic housing acc. to IP67/IP69K

⚡

12 V DC power supply

CAN sensor for the measurement of inclination accelerations with two axes. Communication is via CAN according to ISO 11898, J1939, CANopen or also via RAW CAN.

A robust plastic housing to IP67/IP69K provides the necessary protection for the electronics.

## Technical Data

CAN	1x CAN interface acc. to ISO 11898
Further Protocols	J1939
IP Classification	IP67 or IP69K
Acceleration	±3.5 g
Air pressure	up to 115 kPa
Temperature	−20 °C up to +85 °C



**Mobile Automation**



**Industrial Automation**



**Diagnostics**



**Connectivity**

**We are looking forward to your enquiry!**

**Sontheim Electronic Systems L.P.**

201 West 2nd Street  
52801 Davenport, USA  
Phone: +1 563 888 1471  
Email: [info@sontheim-esys.com](mailto:info@sontheim-esys.com)

**Sontheim Industrie Elektronik GmbH**

Georg-Krug-Straße 2  
D-87437 Kempten  
Phone: +49 (0) 831 575900-0  
Fax: +49 (0) 831 575900-72  
Email: [info@s-i-e.de](mailto:info@s-i-e.de)

**[www.sontheim-esys.com](http://www.sontheim-esys.com)**